


HUSHPOWER

Fitting instructions for Hushpower Detachable .410 Silencer

Can be fitted to any .410 or 9 mm single barrelled shotgun with an external barrel diameter (by the muzzle) of approximately 14mm, 15mm or 16mm

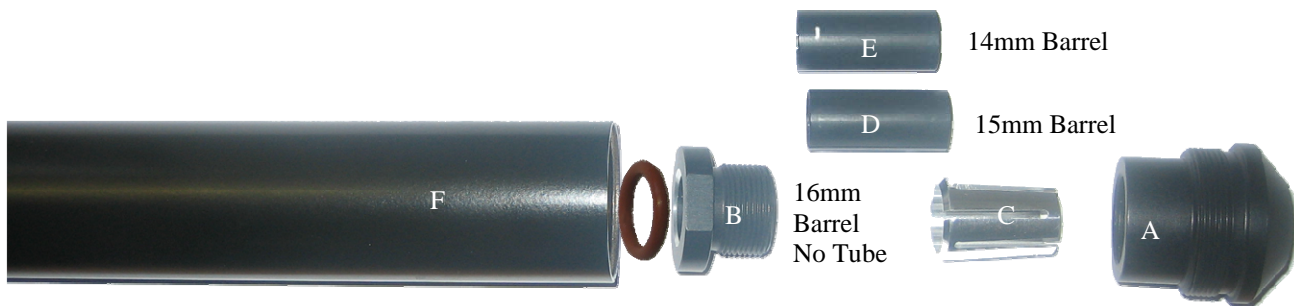

MAKE SURE THE GUN IS NOT LOADED

1. Remove any sighting system from the muzzle.
2. Measure barrel diameter at the muzzle. Barrels of approx 16mm do not require any sizing tube. Barrels of approx 15mm will require the unmarked sizing tube 'D'. Barrels of approx 14mm will require the sizing tube 'E', marked with a 1.
4. For 16mm barrels slide part A over the barrel, then C narrow end first, then part B. Slide C inside A, then screw B into A. Tighten by hand until the unit starts to grip the barrel. Slide the unit into position AT LEAST 10mm behind the foresight hole. Lock unit into place by tightening B into A using a spanner. Slide gas seal 'O ring' G over the barrel and push firmly up against B.
5. Fit a foresight bead to the top of the silencer.

If you have any queries regarding Hushpower products please contact us on
01959 573089.